


Wall Height Light Bar for use in 10 x 20 TrimLine

Installation Instructions

Parts

- (1) Long/Short StaBar Tee Joint
- (1) Long Stabar Ell Joint
- (1) StaBar Ell Joint
- (2) Male pole section – 61" long
- (2) Female pole section – 56 ¼" long, coded red
- (7) Thumbscrews

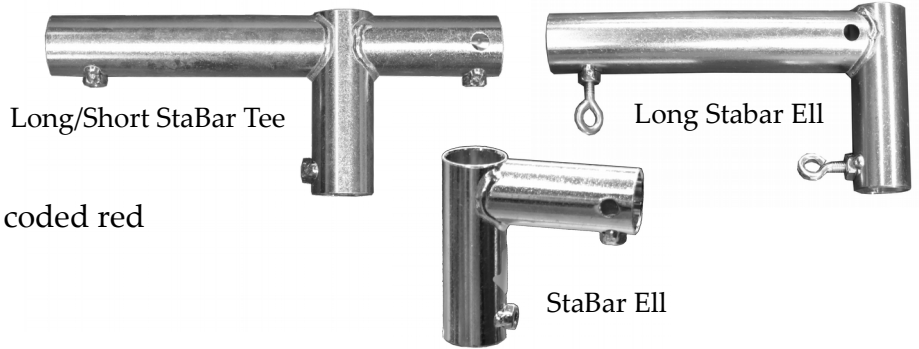

Assembly


1. **While assembling roof frame**, slide Joints onto Riser poles with the a StaBar Ell at each end and the StaBar Tee on the center riser pole -OR- slide joints onto upper horizontal poles of roof frame if you would like to set the Light Bar closer to the front or back of the canopy.

*Check that you have the Long Ell facing the short barrel of the Tee. The shorter StaBar Ell should be matched with the long barrel of the Tee Joint.

2. Connect male and female pole sections to form two 114 ½" poles.

3. Insert red coded end of the 114 ½" pole into Long Ell, sliding it as far in as possible.

4. Now move to the other end of the light pole and slide it back until you are able to click it into place in the StaBar Tee Joint. Repeat with second light pole.

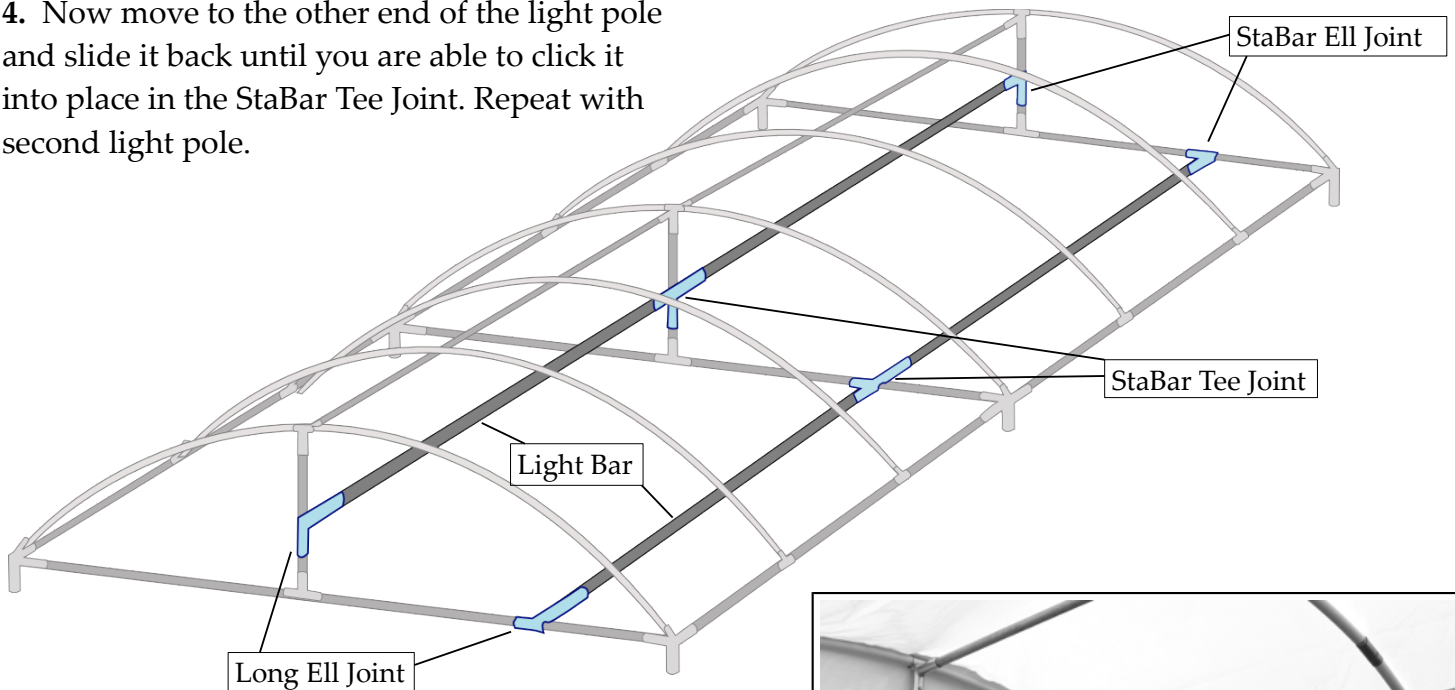

5. The Light Bar may be set at any height along the riser poles, using thumbscrews to secure in place. Finger-tighten thumbscrews.

6. Proceed with assembly of canopy as usual.

